

NEW

LIGHT DUTY SUBMERSIBLE PUMP

**PQ-55022**

TRIPLE LIFE SPAN IMPELLER

COMPARED WITH FORMER PRODUCT

Durable and Long Life Time

Impeller is manufactured from a blended rubber compound providing maximum wear resistance up to three times over cast iron.

Maximal life-span and super hard mechanical seal.

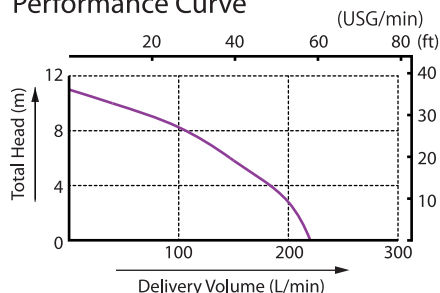
Due to double mechanical seal employed for the shaft, and the SIC at bottom, the shaft hardly wears out and can be used over a long period of time.

Light Weight

Approx. 10% weight saving compared with the conventional Koshin product.

High Efficiency

Approx. 10% reduced starting current compared with former product.

Performance Curve**Specification**

Model		PQ-55022
PUMP	Connection Dia	50 mm (2")
	Total Head	11 m (36 ft)
	Delivery Volume	220 L/min (58 USG/min)
	Pumping up residual water up	Approx. 5 cm
	Minimum starting water level	Approx. 10 cm
MOTOR	Voltage	AC 220 V
	Frequency	50 Hz
	Rated Current	2.7 A
	Output	400 W
	Consumption	550 W
	Revolution	2800 rpm
	Model	Induction Motor
	Power Cord	5 m (16 ft)
Accessories		1 Hoseband, 1 Rope (5 m)
Net Weight		11.5 kg
Gross Weight		12.5 Kg
Dimensions LxWxH (mm)		245 × 205 × 410

KOSHIN LTD.**www.koshinpump.com**